

quarter turn lock




D4-1302






IP65

S
SAINLESS
SERIES

RL

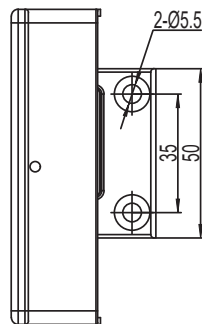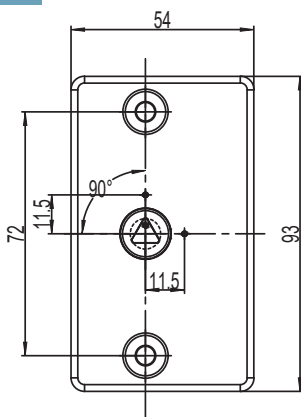

右锁 Right lock

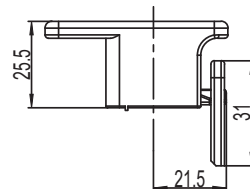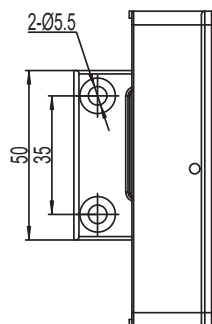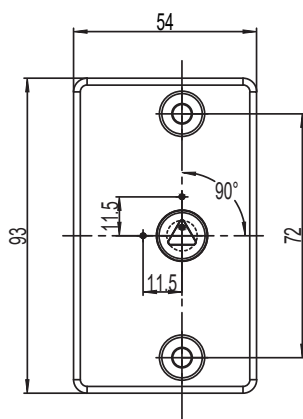

左锁 Left lock

锁芯 Cylinder



147



137

选型 Model selection

锁芯选型
Lock cylinder selection

D4-1302-SX-A1L

A1 代表 SUS304
A1 represents SUS304
L 代表左锁 顺时针旋转锁紧
L represents clockwise rotation and locking of the left lock
R 代表右锁 逆时针旋转锁紧
R represents the counterclockwise

如需获得产品 3D 模型图，请联系 WWW.FORND.COM

1. Material and surface treatment:
Main body, Steel bolt: SUS304 or SUS316

2. Performance parameters:
Protection class: IP65

1. 材质及表面处理:
主体, 钢栓: SUS304 或 SUS316

2. 性能参数:
防护等级: IP65