




Rod Control Swinghandle

**A-1218**



RL

IP40

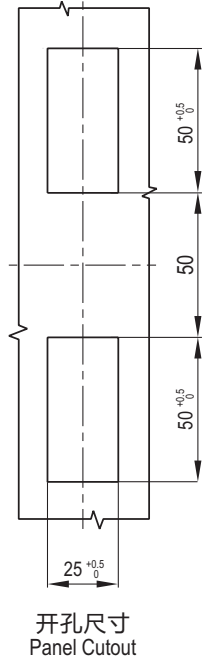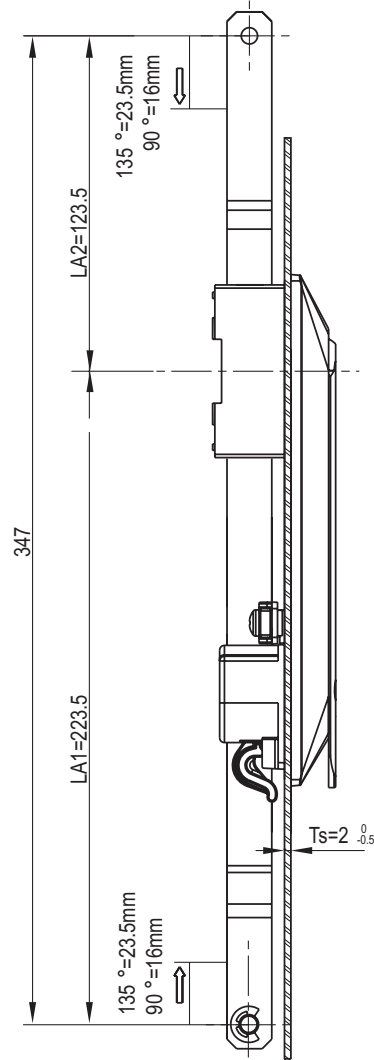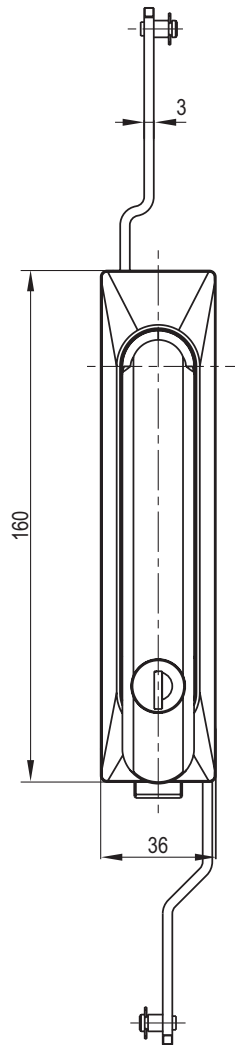

如需获得产品3D模型图，请联系 WWW.FORND.COM

1. Material and surface treatment:  
Lock body, handle: PA66+30%GF;  
Zamak DIN-EN 1774-ZnAl40Cu1  
Steel bolt: iron galvanized  
Sealing ring: EPDM foam.

2. Performance parameters:  
Protection class: IP65  
Handle bearing tension value:  $\leq 390\text{N}$   
Handle bearing torque value:  $\leq 12\text{N}\cdot\text{m}$   
Maximum static load: 300N

3. Remark:  
Key different on request  
CH751 key code on request  
Padlockable on request  
Default keyed K333

1. 材质及表面处理:  
锁体, 手柄: PA66+30%GF  
钢栓: 铁镀锌  
密封圈: EPDM发泡胶。

2. 性能参数:  
防护等级: IP65  
手柄承载拉力值:  $\leq 390\text{N}$   
手柄承载扭矩值:  $\leq 12\text{N}\cdot\text{m}$   
最大静载荷: 300N

3. 备注:  
专用钥匙可选  
CH751 钥匙可选,  
可配挂锁  
默认K333钥匙

Version B (2点拉杆型 2Prod cotrol)	Version C (三点拉杆型 3Prod control)
A-1218-2001-60	A-1218-3001-60