
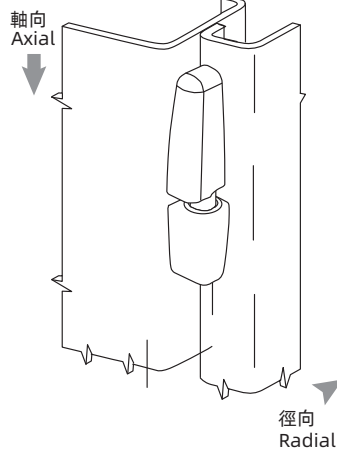
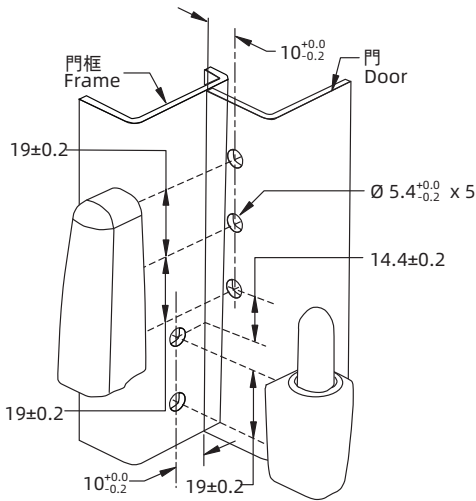
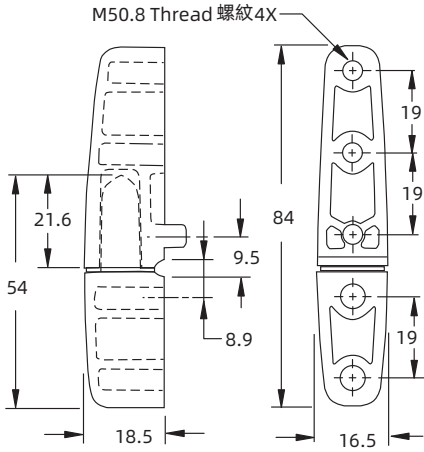


## H1-2306

## Screw-on Hinge

用于提分固定  
For Lift-Off Mounting

用于非提分固定  
For Non Lift-Off Mounting

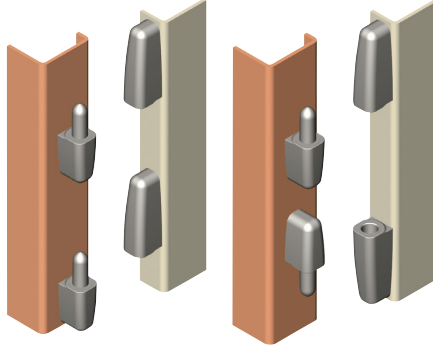

Installation Notes:  
Screws not supplied.  
Attach hinge with four M5 x 0.8  
Maximum screw length = door (or frame) thickness + 10 (.400)

安装说明：  
不提供螺钉。使用四个 M5x0.8 安装铰链  
最大螺钉长度 = 门板（或门框）厚度 +10

	径向载荷 MAX Radial Load	轴向载荷 MAX Axial Load
5#锌合金 Zamak DIN-EN1774- ZnAl4Cu1	1300N	2200N
SUS304	3000N	5000N

1. Material and surface treatment:  
Main body : Zamak DIN-EN 1774-ZnAl4Cu1  
or SUS316

1. 材质及表面处理：  
主体：5#锌合金 或 SUS316

喷塑黑 Black Powder Coated	电镀亮铬 Bright Chrome	SUS304
H1-2306-40	H1-2306-30	H1-2306-A1