




Screw-on Torque Hinge

**H1-2416**

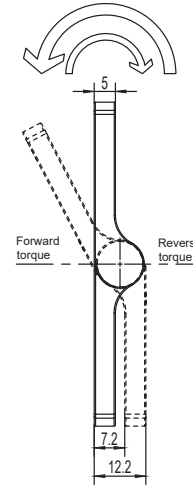

RL

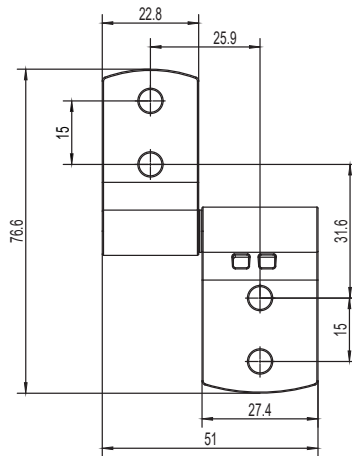

如需获得产品3D模型图，请联系 WWW.FORND.COM

1. Material and surface treatment:  
Main body : Zamak DIN-EN 1774-ZnAl4Cu1

1. 材质及表面处理:  
主体: 5#锌合金

对称扭矩 N.m Symmetric N.m		
麻面黑 Black Textured Powder Coated	亮铬 Bright Chrome	对称扭矩 Symmetrical Torque
H1-2416-14-42	H1-2416-14-30	1.4
H1-2416-18-42	H1-2416-18-30	1.8
H1-2416-23-42	H1-2416-23-30	2.3
H1-2416-34-42	H1-2416-34-30	3.4

不对称扭矩 N.m Asymmetric N.m			
麻面黑 Black Textured Powder Coated	亮铬 Bright Chrome	向前扭矩 N.m Forward Torque N.m	反向扭矩 N.m Reverse Torque N.m
H1-2416-2314F-42	H1-2416-2314F-30	2.3	1.4
H1-2416-3420F-42	H1-2416-3420F-30	3.4	2.0
H1-2416-4527F-42	H1-2416-4527F-30	4.5	2.7
H1-2416-6036F-42	H1-2416-6036F-30	6.0	3.6
H1-2416-1408R-42	H1-2416-1408R-30	1.4	0.8
H1-2416-1811F-42	H1-2416-1811F-30	1.8	1.1
H1-2416-2314F-42	H1-2416-2314F-30	2.3	1.4
H1-2416-3660F-42	H1-2416-3660F-30	3.6	6.0