


A-1112

Swing handle lock

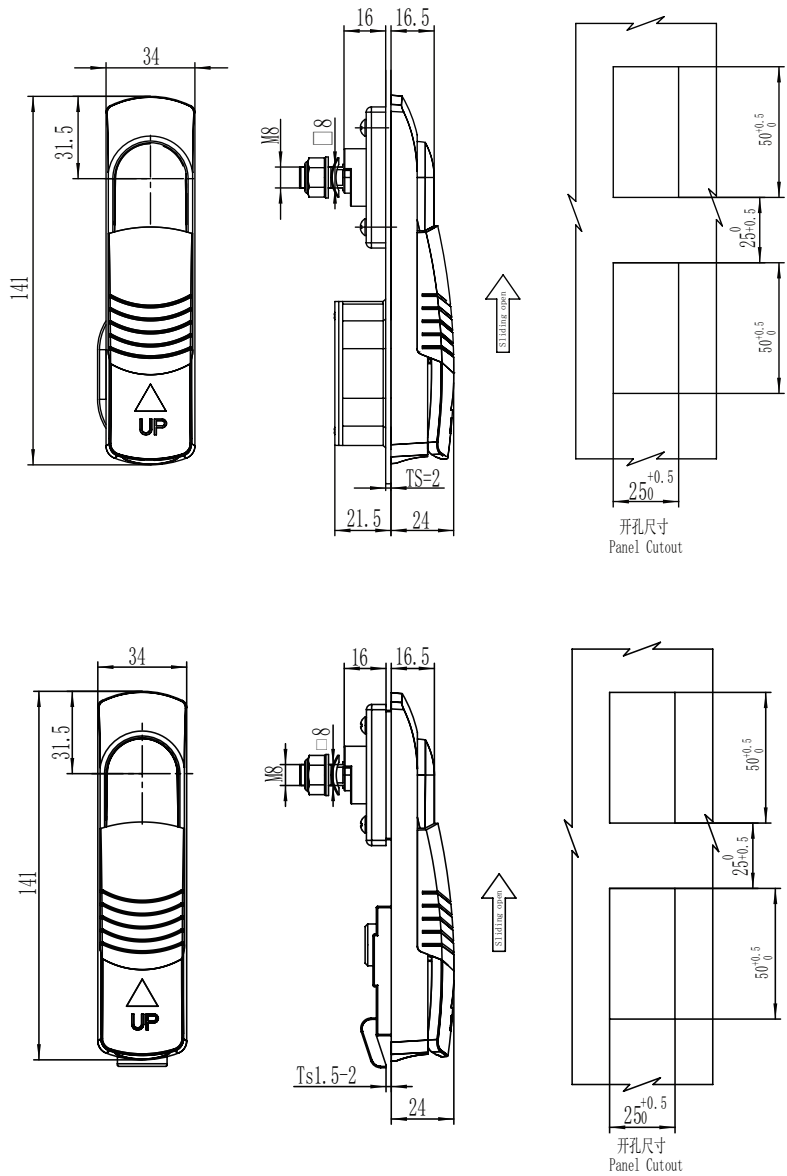

RL

IP65



1. Material and surface treatment:
Lock body, handle, dust cover: PA66+30%GF
Steel bolt: iron galvanized or SUS304
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Handle bearing tension value: $\leq 265\text{N}$
Handle bearing torque value: $\leq 33\text{N}\cdot\text{m}$
Maximum static load: 270N

3. Remarks:
Key different on request.
CH751 key code on request

1. 材质及表面处理:
锁体, 手柄, 防尘盖: PA66+30%GF
钢栓: 铁镀锌或 SUS304
密封圈: EPDM发泡胶。

2. 性能参数:
防护等级: IP65
手柄承载拉力值: $\leq 265\text{N}$
手柄承载扭矩值: $\leq 33\text{N}\cdot\text{m}$
最大静载荷: 270N

3. 备注:
专用钥匙可选
CH751 钥匙可选

如需获得产品 3D 模型图，请联系 WWW.FORND.COM

安装方式 Mounting style	
螺丝安装 Mounting by cap	A-1112-1001-C
卡式安装 Mounting by hook	A-1112-1101-C