

Rod Control Swinghandle






**A-1207**



RL



IP65

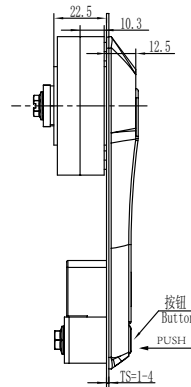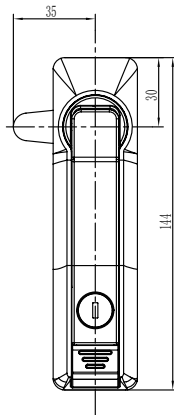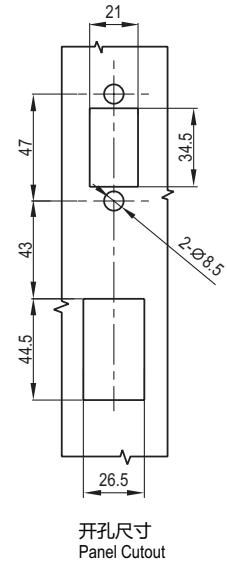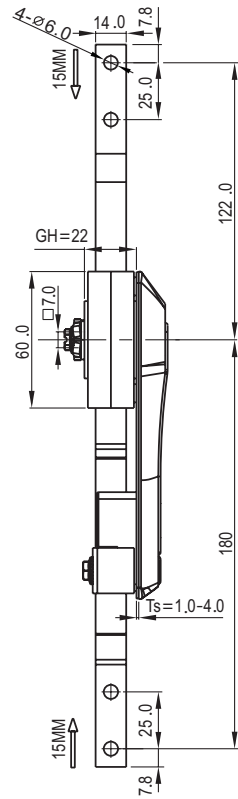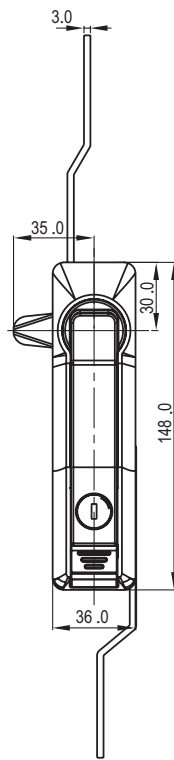

如需获得产品3D模型图，请联系 WWW.FORND.COM

1. Material and surface treatment:  
Lock body, handle, dust cover : Zamak  
DIN-EN 1774-ZnAl4Cu1  
Steel bolt: iron galvanized  
Sealing ring: EPDM foam.

2. Performance parameters:  
Protection class: IP65  
Handle bearing tension value:  $\leq 340\text{N}$   
Handle bearing torque value:  $\leq 28\text{N}\cdot\text{m}$

3. Remark:  
Default Right Hand

1. 材质及表面处理:  
锁体, 手柄, 防尘盖: 5# 锌合金喷塑黑  
螺栓: 铁镀锌  
密封圈: EPDM 发泡胶。

2. 性能参数:  
防护等级: IP65  
手柄承载拉力值:  $\leq 340\text{N}$   
手柄承载扭矩值:  $\leq 28\text{N}\cdot\text{m}$

3. 备注:  
默认手柄右转开启

Version A( 锁舌型 Cam control)		Version B( 两点拉杆型 2Prod control)		Version C( 三点拉杆型 3Prod control)	
纳米喷漆 (银亚光) NM spray painting (matte silver)	喷塑亚光黑 Black powder coated	纳米喷漆 (银亚光) NM spray painting (matte silver)	喷塑亚光黑 Black powder coated	纳米喷漆 (银亚光) NM spray painting (matte silver)	喷塑亚光黑 Black powder coated
A-1207-1001-50	A-1207-1001-40	A-1207-2001-50	A-1207-2001-40	A-1207-3001-50	A-1207-3001-40