


Swing handle lock


**A-1204**

RL

IP65

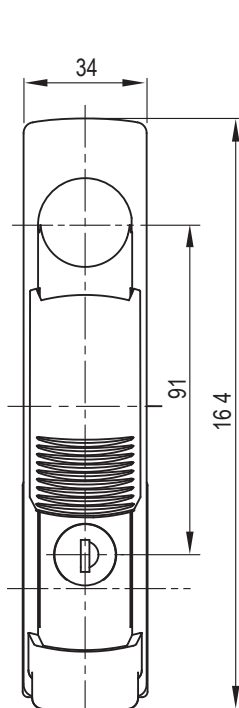

圆柱 K333 相同钥匙  
Alike K333 Round Cylinder

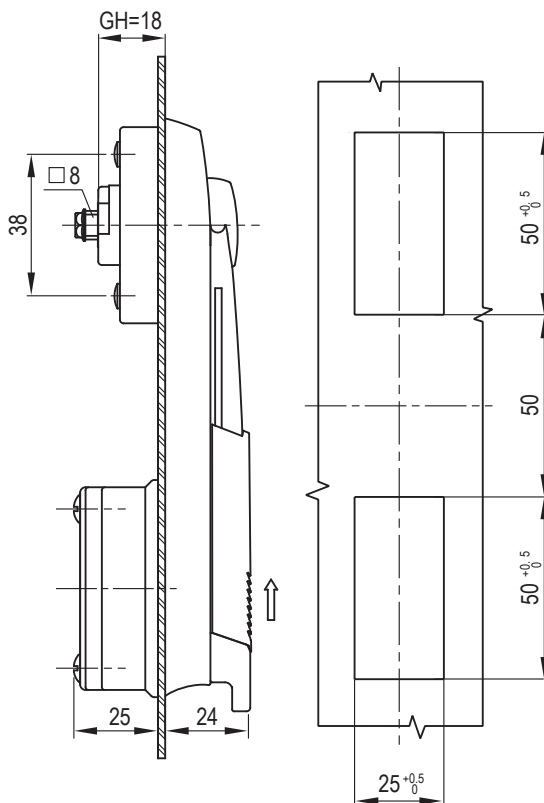

开孔尺寸  
Panel Cutout

如需获得产品3D模型图，请联系 WWW.FORND.COM

1. Material and surface treatment:  
Lock body, handle: PA66+30%GF  
Steel bolt: iron galvanized  
Sealing ring: EPDM foam.

2. Performance parameters:  
Protection class: IP65  
Handle bearing tension value:  $\leq 520\text{N}$   
Handle bearing torque value:  $\leq 27\text{N} \cdot \text{m}$   
Maximum static load: 270N

3. Remarks:  
Optional dedicated key  
CH751 key optional  
Default K333 key

1. 材质及表面处理:  
锁体, 手柄: PA66+30%GF  
钢栓: 铁镀锌  
密封圈: EPDM发泡胶。

2. 性能参数:  
防护等级: IP65  
手柄承载拉力值:  $\leq 520\text{N}$   
手柄承载扭矩值:  $\leq 27\text{N} \cdot \text{m}$   
最大静载荷: 270N

3. 备注:  
专用钥匙可选  
CH751 钥匙可选,  
默认K333钥匙

锁芯 Cylinder style	Version A( 锁舌型 Cam control)
	有防尘盖 With Dust Cap
圆柱 K333 相同钥匙 Alike K333 Round Cylinder	A-1204-1001-60