

**A-1108**


Swing handle lock

RL


STAINLESS SERIES

IP65


IP65

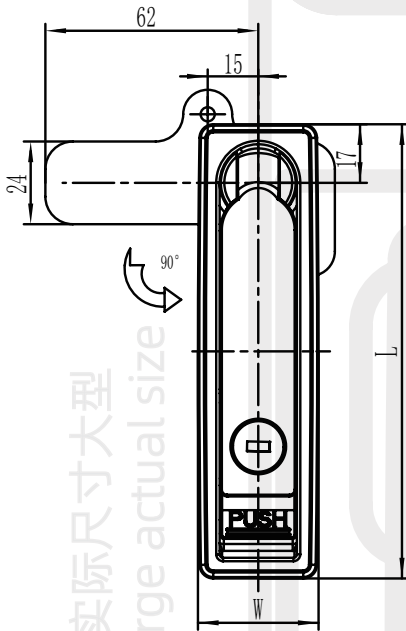

实际尺寸大型  
Large actual size

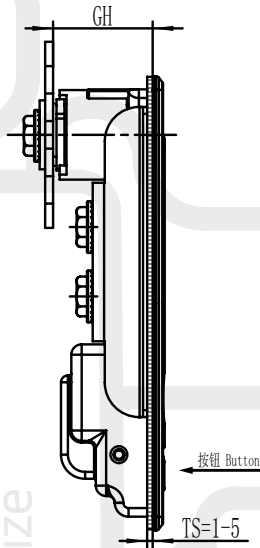

实际尺寸中型  
Medium actual size

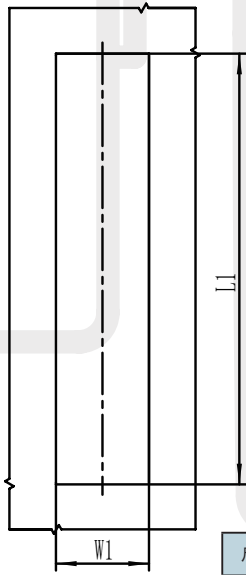

开孔尺寸  
Panel Cutout

实际尺寸小型  
Small actual size

尺寸 Size	L	W	L1	W1	GH
小型 Small	110mm	35mm	103mm	27mm	29mm
中型 Medium	132mm	35mm	125mm	27mm	29mm
大型 Large	149mm	38.2mm	140mm	29.5mm	30mm

1. Material and surface treatment:  
Lock body, handle : Zamak DIN-EN 1774-ZnAl4Cu1 or SUS304  
Steel bolt: iron galvanized or SUS304  
Sealing ring: EPDM foam.
2. Performance parameters:  
Protection class: IP65  
Handle bearing tension value:  $\leq 180\text{N}$   
Handle bearing torque value:  $\leq 14\text{N}\cdot\text{m}$   
Maximum static load: 190N
3. Function Description:  
Open the handle upwards and rotate it 90 degrees to achieve opening or closing.  
Universal left and right locks.
4. Remarks:  
Default key K200

1.材质及表面处理:  
锁体, 手柄: 5#锌合金 或 SUS304  
钢栓: 铁镀锌 或 SUS304  
密封圈: EPDM发泡胶。

2.性能参数:  
防护等级: IP65  
手柄承载拉力值:  $\leq 180\text{N}$   
手柄承载扭矩值:  $\leq 14\text{N}\cdot\text{m}$   
最大静载荷: 190N

3.功能描述:  
手柄向上打开, 旋转 90度, 实现打开或者关闭。左右锁通用。

4.备注:  
默认钥匙 K200

尺寸 Size	锌合金 Zinc alloy				不锈钢 Stainless steel	
	纳米喷漆 (银亚光) NM spray painting (matte silver)		喷塑黑 Powder coating black		不带挂 Without padlo	带挂 Padlockable
	不带挂 Without padlock	带挂 Padlockable	不带挂 Without padlock	带挂 Padlockable		
小型 Small	A-1108-10-50	A-1108-11-50	A-1108-10-40	A-1108-11-40	A-1108-10-A1	A-1108-11-A1
中 Medium	A-1108-20-50	A-1108-21-50	A-1108-20-40	A-1108-21-40	A-1108-20-A1	A-1108-21-A1
大型 Large	A-1108-30-50	A-1108-31-50	A-1108-30-40	A-1108-31-40	A-1108-30-A1	A-1108-31-A1