
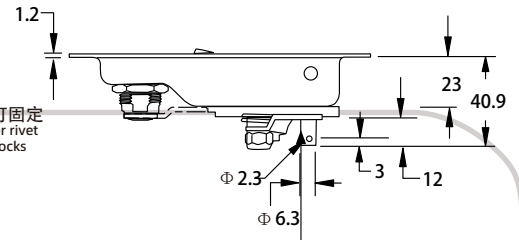
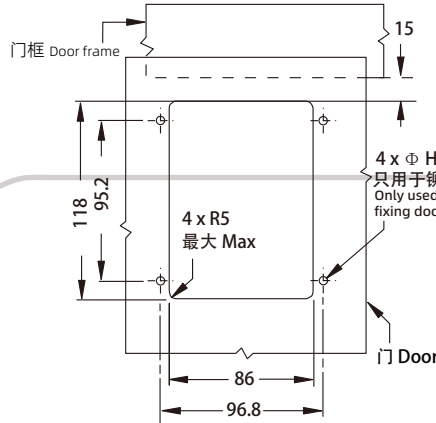
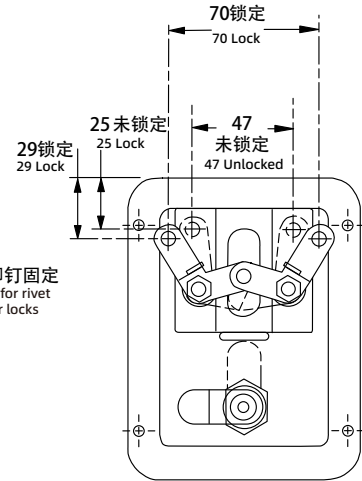
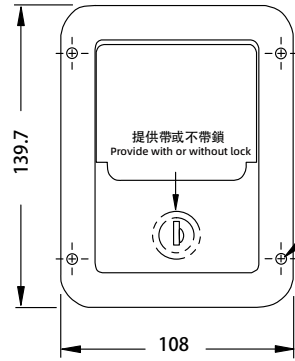
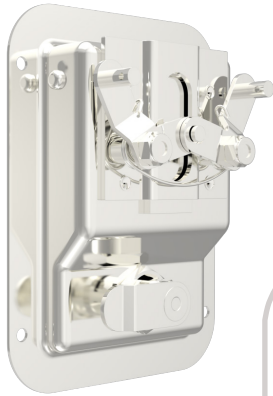


Paddle lock

**B-1506-20**

IP40

S  
SERIES

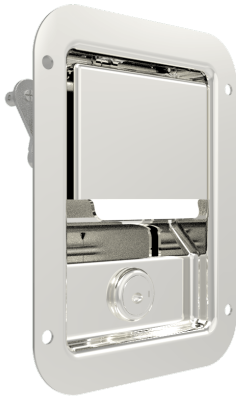

(2PL) 当使用AC线缆, 必须用眼孔接口, 并用开口销钉与眼孔接上。  
(2 PL) When using AC cables, eye sockets must be used, and connect the eyelet with an open pin.

实际尺寸  
Actual size

如需获得产品3D模型图, 请联系 WWW.FORND.COM

1. Material and surface treatment:  
Lock body, handle : SUS304
2. Performance parameters:  
Protection class: IP40
3. Remarks:  
Default CH751 key

1. 材质及表面处理:  
锁体, 手柄: SUS304
2. 性能参数:  
防护等级: IP40
3. 备注:  
默认 CH751 钥匙

SUS304
CH751 钥匙锁定 CH751 key lock
B-1506-20-A1