




Rod Control Swinghandle

**A-1234**

RL



IP65

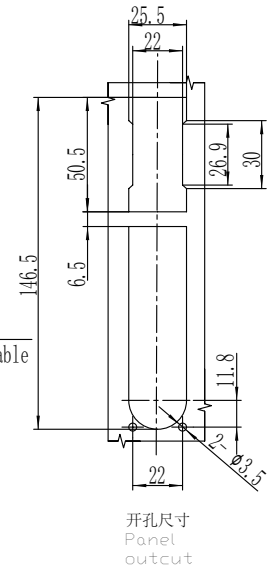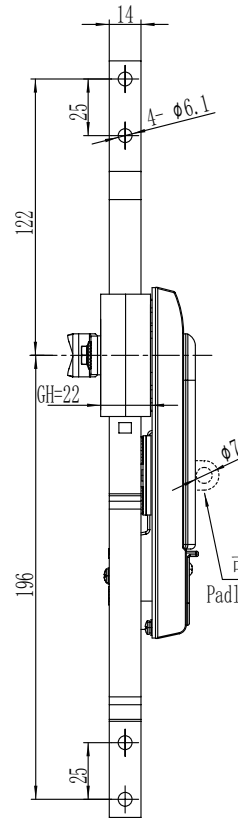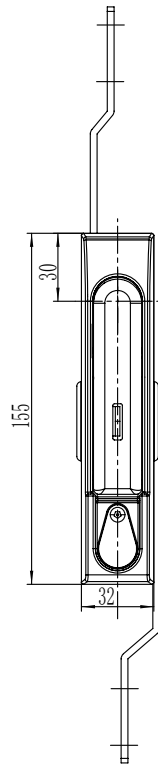

如需获得产品3D模型图，请联系 WWW.FORND.COM

1. Material and surface treatment:  
Lock body, handle, dust cover : Zamak  
DIN-EN 1774-ZnAl4Cu1  
Steel bolt: iron galvanized  
Sealing ring: EPDM foam.

2. Performance parameters:  
Protection class: IP65  
Handle bearing tension value:  $\leq 225\text{N}$   
Handle bearing torque value:  $\leq 20\text{N}\cdot\text{m}$   
Maximum static load: 270N

3. Remark:  
Padlockable on request  
Interchangeable profile cylinder Padlockable on request

1. 材质及表面处理:  
锁体, 手柄, 防尘盖 5#锌合金喷塑黑  
钢栓: 铁镀锌  
密封圈: EPDM发泡胶

2. 性能参数: 防护等级: IP65  
手柄承载拉力值:  $\leq 225\text{N}$   
手柄承载扭矩值:  $\leq 20\text{N}\cdot\text{m}$   
最大静载荷: 270N

3. 备注:  
可配挂锁  
锁头可换

	Version B( 两点拉杆型 2Prod control)		Version C( 三点拉杆型 3Prod control)	
	不带挂 Without padlock	带挂 Padlockable	不带挂 Without padlock	带挂 Padlockable
喷塑黑 Black Powder Coated	A-1234-2002-40	A-1234-2012-40	A-1234-3002-40	A-1234-3012-40
纳米喷漆( 银亚光 )NM spray painting(matte silver)	A-1234-2002-50	A-1234-2012-50	A-1234-3002-50	A-1234-3012-50