

Rod Control Swinghandle


A-1216

RL

S
SAINLESS
SERIES

IP65

IP65

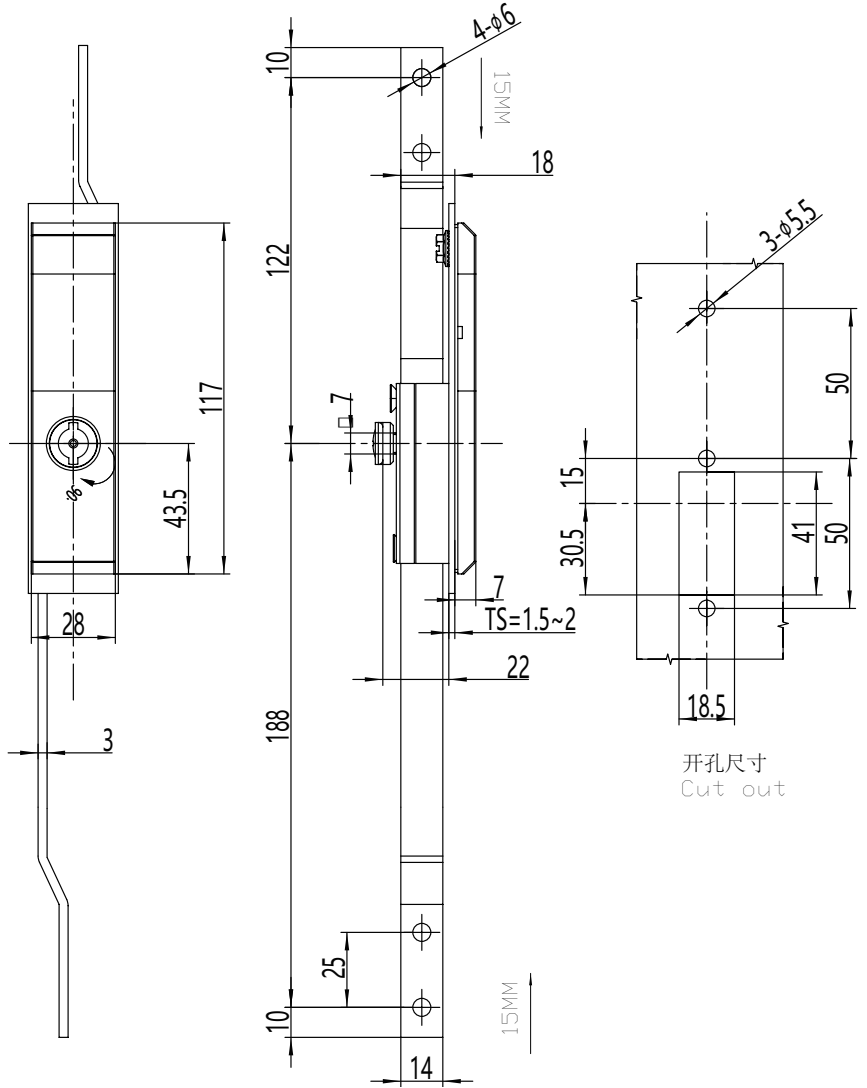

如需获得产品3D模型图，请联系 WWW.FORND.COM

1. Material and surface treatment:
Lock body, handle: Zamak DIN-EN 1774-ZnAl4Cu1 or SUS304
Steel bolt: SUS304
Sealing ring: EPDM foam.

2. Performance parameters:
Protection class: IP65
Input torque value: $\leq 3\text{N}\cdot\text{m}$

3. Remark:
Better locking function and security
The handle can be raised automatically when opened

1. 材质及表面处理:
锁体, 手柄: 5# 锌合金喷塑或不锈钢
螺栓: SUS304
密封圈: EPDM发泡胶

2. 性能参数:
防护等级: IP65
输入扭矩值: $\leq 3\text{N}\cdot\text{m}$

3. 备注: Remark
具有更加可靠的锁紧功能和防盗性能
手柄开启后可以自动撑起

Version C (三点拉杆型 3Prod control)

喷塑米黄 Black Powder Coated	不锈钢 stainless steel
A-1216-3001-48	A-1216-3001-A1